


LUCEVARIA TRACK

TRACK LIGHTING

 made in
HOLLAND

AVAILABLE IN

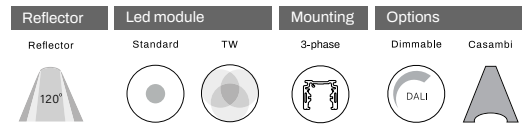

Lumen output	1130mm:	3000lm
	1410mm:	3850lm

CRI	>80Ra • >90Ra
CCT	2700K • 3000K • 4000K • 6500K

FIXTURE SPECIFICATIONS

[View product on website](#)

Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White) • 9006 (Grey)
Fixture type	3-phase track light
LED Module	Osram PrevaLED G6
Driver	Philips Xitanium LED driver
Adapter	Powergear 3-circuit track adapter
IP rating	IP20
Expected lifetime	L80 / B50 @ 70.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

Fixture weight:



FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Osram PrevaLED G6	1500lm	830 / 840	136 / 136	12.0W	DALI / Casambi
Osram PrevaLED G6	1500lm	930	100	15.0W	DALI / Casambi
Osram PrevaLED G6	1500lm	940	115	15.0W	DALI / Casambi
Osram PrevaLED G6	3000lm	830 / 840	136 / 136	24.0W	DALI / Casambi
Osram PrevaLED G6	3000lm	930	100	29.0W	DALI / Casambi
Osram PrevaLED G6	3000lm	940	120	29.0W	DALI / Casambi
Osram PrevaLED G6	3850lm	830 / 840	128 / 128	30.0W	DALI / Casambi
Osram PrevaLED G6	3850lm	930	99	36.0W	DALI / Casambi
Osram PrevaLED G6	3850lm	940	113	36.0W	DALI / Casambi

Fixture variations:

- ¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
- ²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.
- ³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.
- ⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE CONFIGURATOR

IN

FIXTURE LENGTH

LIGHT COLOUR

REFLECTOR

FIXTURE COLOUR

DIM OPTIONS

LUMEN OUTPUT

Article code configurator:

- ¹⁾ This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome