


DIABLO HE • BLACK

RINOVA
TRACK LIGHTING

made in HOLLAND

AVAILABLE IN




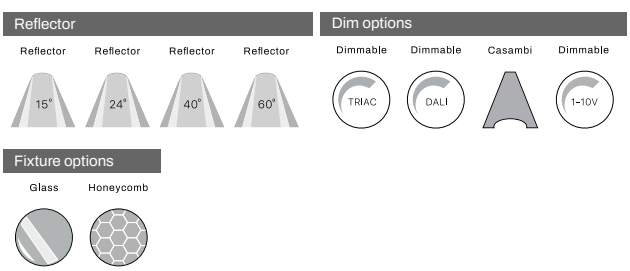

Lumen output	1100lm • 2000lm • 3000lm
CRI	>80Ra • >90Ra • >98Ra
CCT	2700K • 3000K • 4000K • DTW • FOOD • TW

FIXTURE SPECIFICATIONS

View product on website

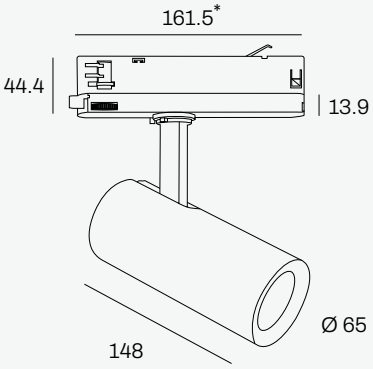

Fixture weight: 275 grams

Housing material	Bio circular polycarbonate
RAL colour	9004 (Black) • 9003 (White) • 9006 (Grey)
Fixture type	3-phase track light
LED Module	Philips Fortimo SLM LED
Driver	Philips Xitanium in-track adapter
Number of light sources	1
Adjustability	350° rotatable and 90° tiltable
IP rating	IP20
Expected lifetime	L90 / B10 @ 66.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

* Length of in-track adapter may vary depending on selected dimming options

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV

FIXTURE VARIATIONS


LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Philips Fortimo SLM G8 HE	1100lm	827 / 830 / 840	152	7.2W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	1100lm	927 / 930 / 930PW	121	9.1W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	1100lm	940PW	152	7.2W	Triac / DALI / Casambi
Bakery	1100lm	2500K BA	124	8.9W	Triac / DALI / Casambi
Meat Premium Red	1100lm	MPR	70	15.8W	Triac / DALI / Casambi
Fresh Fish	1100lm	940 FF	122	9.0W	Triac / DALI / Casambi
Dim-to-warm	1100lm	1800K - 3000K	81	13.5W	Triac / DALI / Casambi
Tunable white	1100lm	2700K - 6500K	78	14.1W	DALI
Philips Fortimo SLM G8 HE	2000lm	827 / 830 / 840	135	14.8W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	2000lm	927 / 930 / 930PW	135	14.8W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	2000lm	940PW	135	14.8W	Triac / DALI / Casambi
Bakery	2000lm	2500K BA	125	16.0W	Triac / DALI / Casambi
Meat Premium Red	2000lm	MPR	69	29.0W	Triac / DALI / Casambi
Fresh Fish	2000lm	940 FF	110	18.3W	Triac / DALI / Casambi
Dim-to-warm	2000lm	1800K - 3000K	87	23.0W	Triac / DALI / Casambi
Tunable white	2000lm	2700K - 6500K	79	25.4W	DALI
Philips Fortimo SLM G8 HE	3000lm	827 / 830	135	22.2W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	3000lm	840	149	20.1W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	3000lm	927 / 930 / 930PW	135	22.2W	Triac / DALI / Casambi
Philips Fortimo SLM G8 HE	3000lm	940PW	135	22.2W	Triac / DALI / Casambi
Dim-to-warm	3000lm	1800K - 3000K	91	32.8W	Triac / DALI / Casambi
Tunable white	3000lm	2700K - 6500K	86	35.0W	DALI

Fixture variations:
[1]) Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
[2]) Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerence of up to +/- 150 Kelvin compared to nominal value.
[3]) Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.
[4]) Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.


Technical data can be changed by Internova Professional Lighting BV without prior notice.

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV


POLAR DIAGRAMS

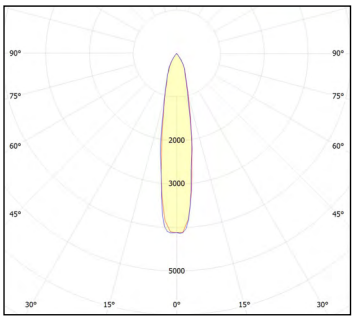


cd/klm
c0/c180
c90/270
n= 92%
15 degrees

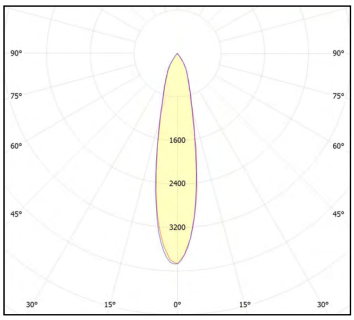

cd/klm
c0/c180
c90/270
n= 92%
24 degrees

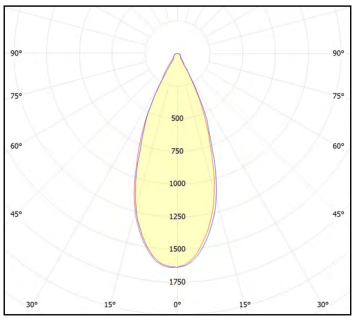

cd/klm
c0/c180
c90/270
n= 92%
40 degrees

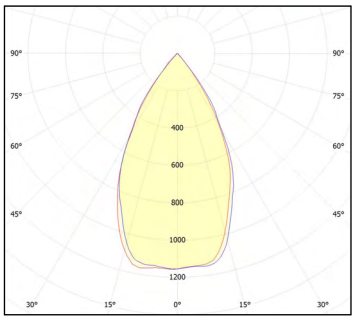

cd/klm
c0/c180
c90/270
n= 92%
60 degrees

Rithmeesterpark 21 | 4838 GZ Breda | The Netherlands
+31 (0) 76 520 5566 | info@internova.nl

© 2025 INTERNOVA PROFESSIONAL LIGHTING BV