

VISIONE 360




Colours	□ ■ ■
Housing	Aluminium, die cast
Fixture type	Recessed
Module	Standard Dim-to-Warm LED module
Driver	Standard TRIAC-dimmable driver
Light Output module	520lm
CCT	DTW 1800K-3000K
CRI	>90Ra
Beam angles	40°
Rotatable	360°
Tilttable	30°
LED modules	Standard
Dimming Options	DALI, Casambi
Options	Glass (standard)
Expected Lifetime	35.000h (L70/B30)
Cut out Size	Ø76 x H50mm
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	3 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
280 grams	11 x 11 x 9 cm	30

Available LED Modules

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Visione360 DTW	520lm	7W	74	1800K-3000K	>90						

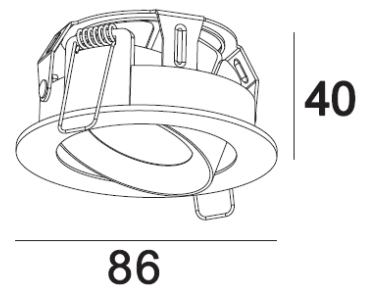

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.