


SALINA
PENDANT LIGHTING

made in
HOLLAND


AVAILABLE IN

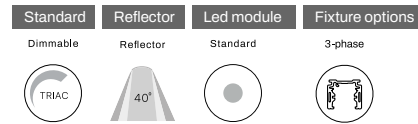

| | |
|--------------|-------|
| Lumen output | 300lm |
| CRI | >90Ra |
| CCT | 2700K |

FIXTURE SPECIFICATIONS

 [View product on website](#)



Fixture weight: 550 grams
Suspension: 200 cm



| | |
|-------------------------|--|
| Housing material | Die cast aluminium |
| Material finish | Powder coating |
| RAL colour | 9005 (Black) • 9016 (White) • 1036 (Gold) |
| Fixture type | Pendant light |
| LED Module | Bridgelux V4 HD LED |
| Driver | Triac dimmable driver in ceiling cap |
| Adapter | Powergear 3-circuit track adapter (optional) |
| Number of light sources | 1 |
| IP rating | IP20 |
| Expected lifetime | L90 / B10 @ 70.000 hours |
| Photobiological safety | RG1 Unlimited |
| Power factor | > 0.9 |
| Colour consistency | 3 SDCM |
| Warranty | 3 years on LED module and driver |

FIXTURE VARIATIONS

| LED module | Lumen | Light colour | Efficiency (Lm/W) | Power | Dim options |
|---------------------|-------|--------------|-------------------|-------|-------------|
| Bridgelux V4 HD LED | 300lm | 927 | 43 | 7W | Triac |

Fixture variations:

- ¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
- ²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.
- ³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the gross lumen output and power consumption of both the LED module and driver
- ⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting without prior notice.

ARTICLE CODE CONFIGURATOR

IN

LUMEN OUTPUT

LIGHT COLOUR

REFLECTOR

FIXTURE COLOUR

OPTIONS


DIM OPTIONS

STANDARD

Article code configurator:

- ¹⁾ This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome

POLAR DIAGRAMS

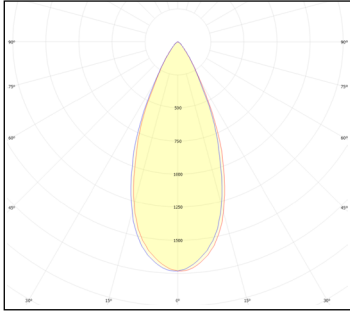

cd/klm n= 92%
— c0/c180
— c90/270 40 degrees