

# LABARRA




<b>Colours</b>	□ ■
<b>Housing</b>	Aluminium
<b>Fixture type</b>	Track light
<b>Module</b>	Osram LED Linear
<b>Driver</b>	Osram Optotronic LED driver
<b>Light Output module</b>	4500lm, 6000lm, 14000lm
<b>CCT</b>	3000K, 4000K
<b>CRI</b>	>80Ra
<b>Beam angles</b>	30°, 60°, 90° (Symetric or A-Symetric)
<b>Adapter</b>	Powergear® 3-phase adapter included
<b>LED modules</b>	Standard
<b>Dimming Options</b>	N/A
<b>Options</b>	PMMA Transparant, Translucent
<b>Expected Lifetime</b>	>50.000h (L90/B50)
<b>Photobiological safety</b>	RG1 unlimited
<b>Power factor</b>	> 0.9
<b>LOR</b>	> 90%
<b>UGR</b>	< 19
<b>Colour consistency</b>	3 SDCM
<b>Warranty</b>	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
2900 grams	122 x 9 x 9 cm	6

## Available LED Modules

**OSRAM**  
LED Inside

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Osram PrevaLED BAR G3	4500lm	27W	166	830, 840	>80						
Osram PrevaLED BAR G3	6000lm	48W	128	830, 840	>80						
Osram PrevaLED BAR G3	14000lm	103W	136	830, 840	>80						

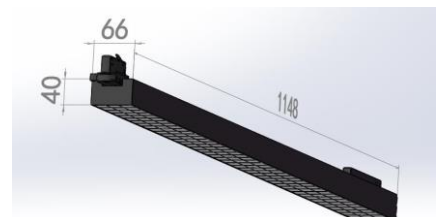

### LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

<sup>1)</sup> Lumen output of LED module (COB)

<sup>2)</sup> Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

<sup>3)</sup> Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.