


# TRIPOLORE

made in  
HOLLAND

**PHILIPS**  
LED SLM INSIDE

**INTERNOVA**  
PROFESSIONAL LIGHTING




<b>Housing</b>	Aluminium, die cast
<b>RAL colour</b>	9004 (Black), 9003 (White)
<b>Fixture type</b>	3-phase track light
<b>Module</b>	Philips Fortimo SLM LED module
<b>Driver</b>	Philips Xitanium Mini LED Driver
<b>Lumen output</b>	3x 800lm, 3x 1500lm
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80Ra, >90Ra
<b>Beam angles</b>	15°, 24°, 40°
<b>Adapter</b>	Powergear® 3-phase adapter included
<b>Rotatable</b>	350°
<b>Tiltable</b>	90°
<b>Expected Lifetime</b>	>50.000h (L90/B50)
<b>Photobiological safety</b>	RG1 unlimited
<b>Power factor</b>	> 0.9
<b>LOR</b>	> 90%
<b>Colour consistency</b>	3 SDCM
<b>Warranty</b>	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
1195 grams	32 x 19 x 7 cm	10

## LED MODULES

Standard Premium



## OPTIONS


## LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Philips Fortimo SLM G7	3x 800Lm	16W	150	827, 830	>80Ra						
Philips Fortimo SLM G7	3x 800Lm	15W	160	840	>80Ra						
Philips Fortimo SLM G7	3x 800Lm	18W	133	927, 930, 930PW	>90Ra						
Philips Fortimo SLM G7	3x 800Lm	17W	141	940PW	>90Ra						
Philips Fortimo SLM G7	3x 1500Lm	25W	155	827, 830	>80Ra						
Philips Fortimo SLM G7	3x 1500Lm	28W	167	840	>80Ra						
Philips Fortimo SLM G7	3x 1500Lm	30W	125	927, 930, 930PW	>90Ra						
Philips Fortimo SLM G7	3x 1500Lm	30W	140	940PW	>90Ra						

LED modules  
 Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K  
 Premium White (PW): for fresh white and depth of colour in retail environments  
 1) Lumen output of LED module (COB)  
 2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.  
 The power of the complete fixture will be slightly higher due to the power consumption of the driver.  
 3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.  
 Technical data can be changed by Internova without prior notice.


**It all starts with light**

## ARTICLE CODE STRUCTURE

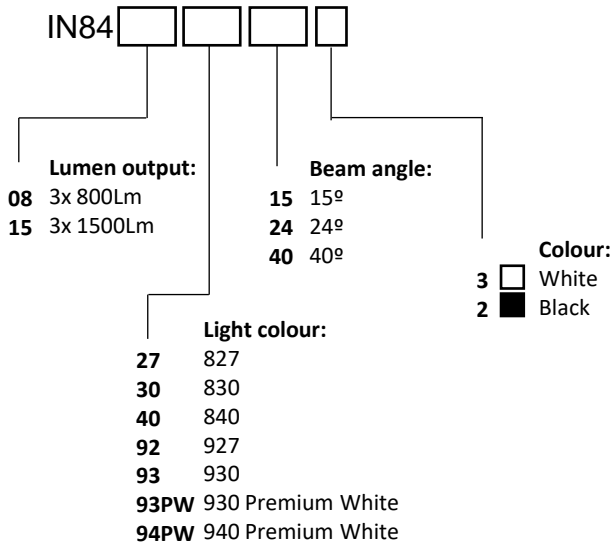


## POLAR DIAGRAMS

15°

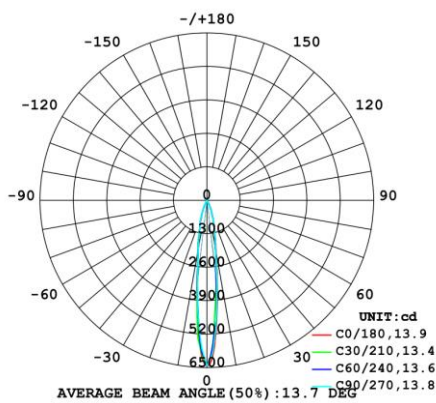

24°

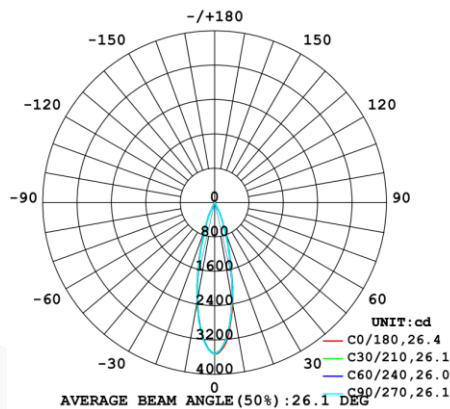

40°

