

LUCEVARIA PENDANT




Colours	□ ■ ■
Housing	Aluminium, die cast
Fixture type	Pendant
Module	Osram LED Linear
Driver	Osram driver
Light Output module	1150mm: 3000lm 1430mm: 3850lm
CCT	3000K, 4000K
CRI	>80Ra
Beam angles	120°
LED modules	Standard
Dimming Options	DALI, Casambi
Options	Supplied with suspension kit
Suspension length	3m
Expected Lifetime	>50.000h (L90/B50)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
Grams		

Available LED Modules

OSRAM
LED Inside

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Osram LED Linear 590mm	1500lm	12W	133	830, 840	>80						
Osram LED Linear 1150mm	3000lm	26W	115	830, 840	>80						
Osram LED Linear 1430mm	3850lm	30W	127	830, 840	>80						

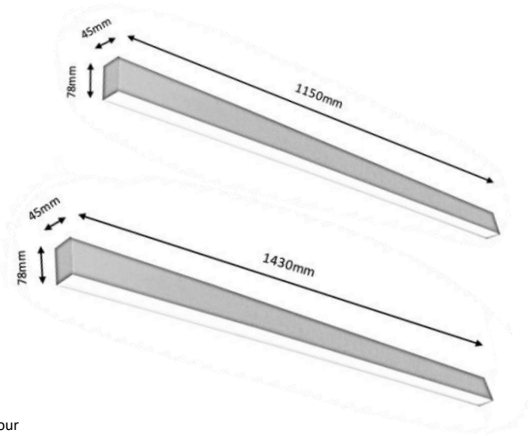

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.