


# LUMINOSA TRACK

## TRACK LIGHTING

made in  
**HOLLAND**

AVAILABLE IN

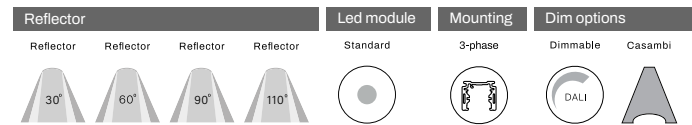

**Lumen output**

1140mm:	4500lm • 6000lm
1700mm:	6000lm • 9000lm

**CRI** >80Ra • >90Ra  
**CCT** 3000K • 4000K • 5000K • 6500K

## FIXTURE SPECIFICATIONS

 [View product on website](#)

<b>Housing material</b>	Die cast aluminium
<b>Material finish</b>	Powder coating
<b>RAL colour</b>	9004 (Black) • 9003 (White)
<b>Fixture type</b>	3-phase track light
<b>LED Module</b>	Osram Vossloh-Schwabe LED Linear
<b>Driver</b>	Osram Vossloh-Schwabe comfort line
<b>Adapter</b>	Powergear 3-circuit track adapter
<b>IP rating</b>	IP20
<b>Expected lifetime</b>	L80 / B50 @ 70.000 hours
<b>Photobiological safety</b>	RG1 Unlimited
<b>Power factor</b>	> 0.9
<b>Colour consistency</b>	3 SDCM
<b>Warranty</b>	5 years on LED module and driver

Fixture weight:



## FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Osram V-S LED 1140mm	4500lm	830	181	28.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	840 / 850 / 865	196 / 196 / 196	28.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	930	145	32.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	940	164 / 164	32.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	830	181	38.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	840 / 850 / 865	196 / 196 / 196	38.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	930	145	42.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	940	164 / 164	43.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	830	181	65.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	840 / 850 / 865	196 / 196 / 196	57.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	930	145	62.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	940	164 / 164	73.0W	DALI / Casambi

Fixture variations:

- <sup>1)</sup> Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
- <sup>2)</sup> Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.
- <sup>3)</sup> Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.
- <sup>4)</sup> Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

## ARTICLE CODE CONFIGURATOR

IN

**FIXTURE LENGTH**

**LIGHT COLOUR**

**REFLECTOR**

**FIXTURE COLOUR**

**DIM OPTIONS**

**LUMEN OUTPUT**

Article code configurator:

- <sup>1)</sup> This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome