

VOLANTE

PENDANT LIGHTING

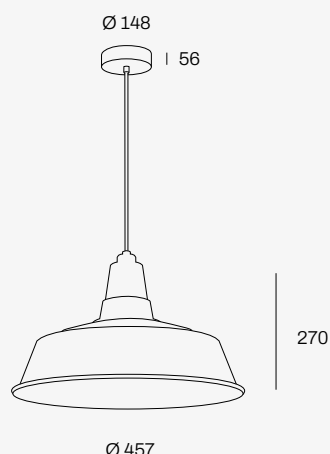
AVAILABLE IN

 made in
HOLLAND

Reflector	Led module				Dim options		
Reflector	Standard	Premium	DTW	HE+	Dimmable	Dimmable	Casambi
							

Lumen output	1100lm • 2000lm • 2500lm
CRI	>80Ra • >90Ra
CCT	2700K • 3000K • 3500K • 4000K • 5700K

FIXTURE SPECIFICATIONS

[View product on website](#)


Fixture weight: 2500 grams
 Suspension: 200 cm



Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White)
Fixture type	Pendant Light
LED Module	Philips Fortimo SLM LED
Driver	Philips Xitanium LED driver in ceiling cap
Number of light sources	1
IP rating	IP20
Expected lifetime	L90 / B10 @ 66.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Philips Fortimo SLM G7	1100lm	827 / 830 / 840	135 / 141 / 146	7.5W	Triac / DALI / Casambi
Philips Fortimo SLM G7	1100lm	857	147	7.4W	Triac / DALI / Casambi
Philips Fortimo SLM G7	1100lm	927 / 930 / 930PW / 935PW / 940PW	111 / 115 / 115 / 121 / 124	9.4W	Triac / DALI / Casambi
Dim-to-warm	1100lm	1800K - 3000K	83	14.0W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	827 / 830 / 840	124 / 129 / 134	15.6W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	857	142	15.1W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	927 / 930 / 930PW	99 / 102 / 102	19.9W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2000lm	935PW / 940PW	110 / 113	17.7W	Triac / DALI / Casambi
Dim-to-warm	2000lm	1800K - 3000K	83	23.5W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2500lm	827 / 830 / 840 / 857	125 / 130 / 135 / 135	23.2W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2500lm	927 / 930 / 930PW	99 / 102 / 102	29.7W	Triac / DALI / Casambi
Philips Fortimo SLM G7	2500lm	935PW / 940PW	109 / 112	27.5W	Triac / DALI / Casambi

Fixture variations:

¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)

²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.

³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.

⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE CONFIGURATOR

IN

63

LUMEN OUTPUT

LIGHT COLOUR

REFLECTOR

FIXTURE COLOUR

DIM OPTIONS

Article code configurator:
*) This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome

POLAR DIAGRAMS

