




Colours	□ ■ ■
Housing	Aluminium, die cast
Fixture type	Track light
Module	Philips Fortimo SLM Led module
Driver	Philips Xitanium Mini
Light Output module	3x 1500lm*
CCT	2700K, 3000K, 4000K
CRI	>80Ra, >90Ra
Beam angles	10°, 22°, 38°
Adapter	Powergear® 3-phase adapter included
Rotatable	350°
Tiltable	90°
LED modules	Standard
Dimming Options	-
Options	Glass, Honeycomb
Expected Lifetime	50.000h (L80/B10)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

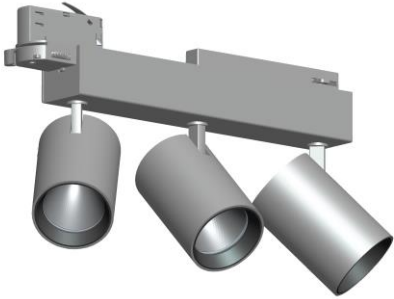

Net Weight	Dimensions carton L x W x H	Qty outer carton
grams	00 x 00 x 00 cm	

Available LED Modules

Description	Lumen	Watt	Lm/W	CCT	CRI
Philips Fortimo SLM G7	3x 800lm	15W	160	827,830,840	>80
Philips Fortimo SLM G7	3x 800lm	18W	133	927,930,930PW	>90
Philips Fortimo SLM G7	3x 800lm	17W	141	940PW	>90
Philips Fortimo SLM G7	3x 800lm	20W	120	930 PC	>90
Philips Fortimo SLM G7	3x 1500lm	28W	167	827, 830, 840	>80
Philips Fortimo SLM G7	3x 1250lm*	30W	125	927, 930, 930PW	>90
Philips Fortimo SLM G7	3x 1400lm	30W	140	940 PW	>90
Philips Fortimo SLM G7	3x 1250lm	30W	125	930 PC	>90

LED modules
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K
Premium White (PW): for fresh white and depth of colour in retail environments
*) Lumen output of LED module (COB)
2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.

