

- Housing
- RAL colour
- Fixture type
- Module
- Driver
- Lumen output
- CCT
- CRI
- Beam angles
- Expected Lifetime
- Photobiological safety
- Power factor
- LOR
- Colour consistency
- Warranty

Aluminium, die cast
9004 (Black), 9003 (White)
Surface mounted
Philips Fortimo SLM LED module
Philips Xitanium LED driver
1100lm, 2000lm, 3000lm
2700K, 3000K, 3500K, 4000K, 5700K
>80Ra, >90Ra
15°, 24°, 40°
L80B10 >70.000 / L90B50 >50.000h
RG1 unlimited
> 0.9
> 90%
3 SDCM
3 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
1671 grams	23 x 13 x 14 cm	12

LED MODULES

Standard Premium DTW HE+



OPTIONS

Dimmable Dimmable Dimmable Casambi Honeycomb Glass



LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.


³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour

temperature is subject to a tolerance of up to ± 150 Kelvin compared to the nominal value.


Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

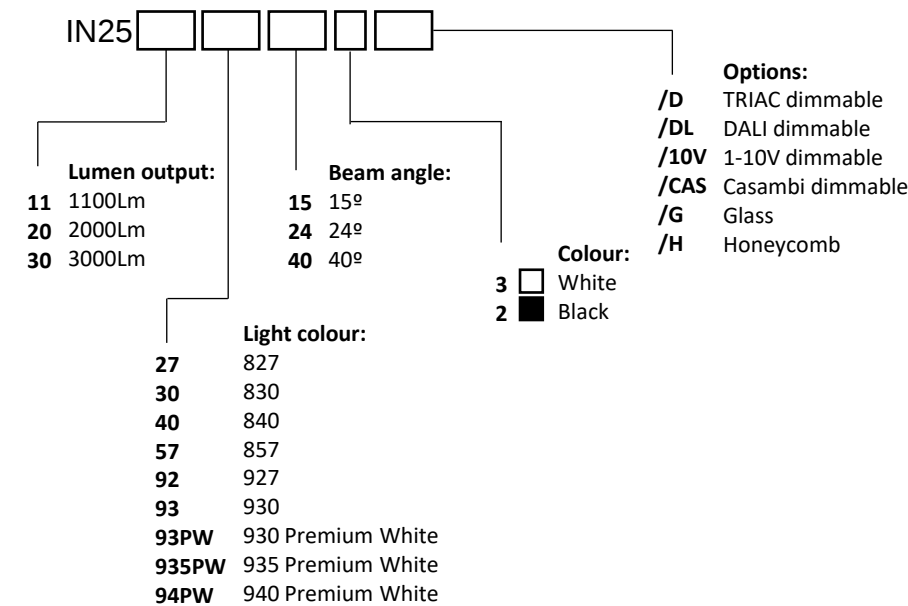

POLAR DIAGRAMS

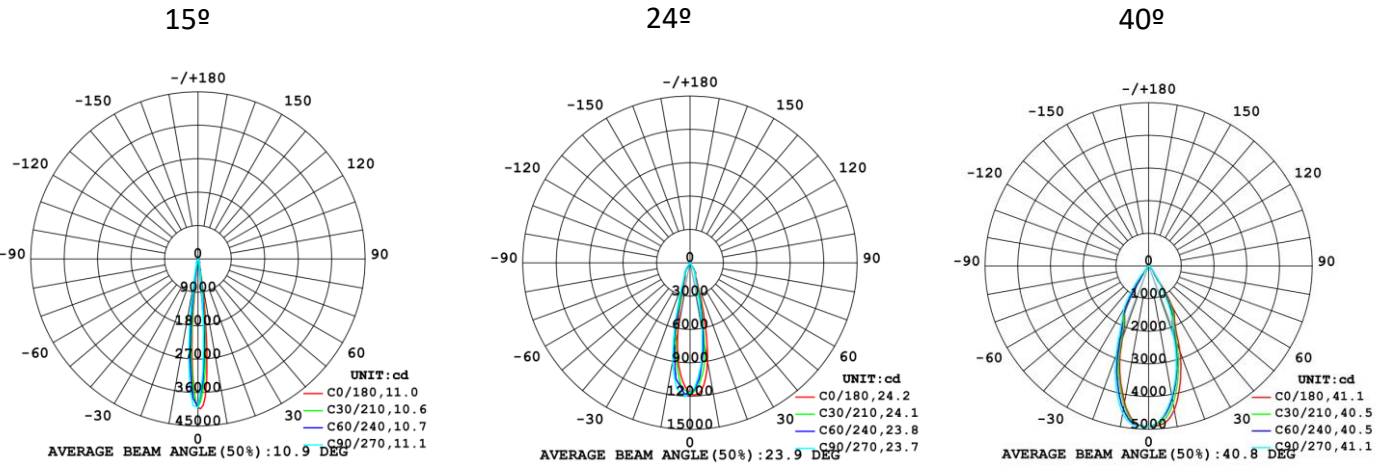

It all starts with light