METEORA-S







Net Weight	Dimensions carton L x W x H	Qty outer carton			
256 grams	8 x 7 x 24 cm	24			

Housing **RAL** colour Fixture type Module

Driver Lumen output

CCT CRI

Beam angles Adapter Rotatable

Tiltable **Expected Lifetime Photobiological safety**

Power factor UGR

Colour consistency

Warranty

Aluminium, die cast

9004 (Black), 9003 (White), 1036 (Gold)

3-phase track light Bridgelux V6 LED TRIAC dimmable driver 500lm, 700lm

2700K, DTW (3000K - 2000K)

>90Ra 15º, 24º, 40º

Powergear® 3-phase adapter included

90⁰

50.000h L80/B10 RG1 unlimited

> 0.9 < 19 3 SDCM

3 years warranty on LED module and driver

LED MODULES





OPTIONS

Dimmable

Casambi





LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	ССТ	CRI	Description	Lumen	Watt	Lm/W	ССТ	CRI
Bridgelux V6	700Lm	8W	73	927	>90Ra						
Bridgelux V6 DTW	500Lm	8W	73	3000K-2000K	>90Ra						

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

1) Lumen output of LED module (COB)

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value. Technical data can be changed by Internova without prior notice.

It all starts with light


²) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

METEORA-S





ARTICLE CODE STRUCTURE

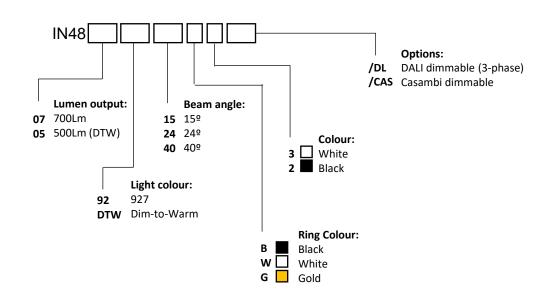

POLAR DIAGRAMS

