


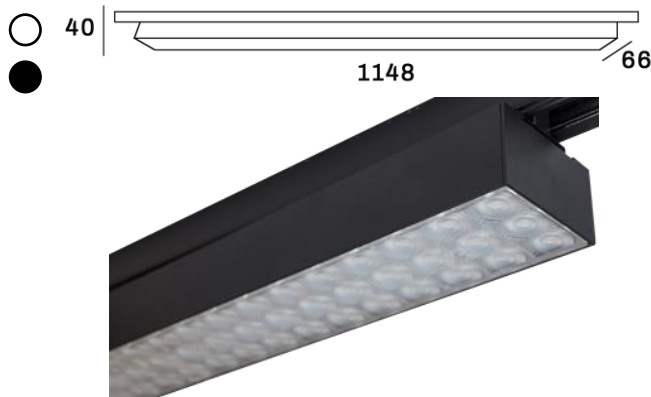

Net Weight	Dimensions carton L x W x H	Qty outer carton
2900 grams	122 x 9 x 9 cm	6

Housing	Aluminium, tin-plate
RAL colour	9004 (Black), 9003 (White)
Fixture type	3-phase track light
Module	Osram LED Linear
Driver	Osram Optotronic LED driver
Lumen output	4500lm, 6000lm, 9000lm, 14000lm
CCT	3000K, 4000K
CRI	>80Ra
Beam angles	30°, 60°, 90° (symmetric or a-symmetric)
Adapter	Powergear® 3-phase adapter included
Options	PMMA Transparent, Translucent
Expected Lifetime	L80B10 >70.000 / L90B50 >50.000h
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

LED MODULES

Standard



OPTIONS

Casambi



LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.


³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour

temperature is subject to a tolerance of up to ± 150 Kelvin compared to the nominal value.




Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

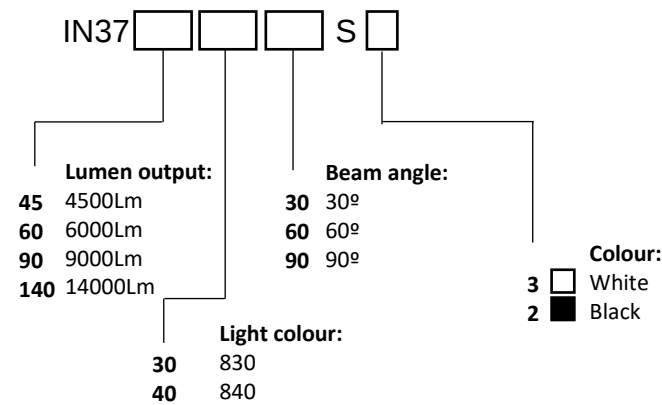

POLAR DIAGRAMS

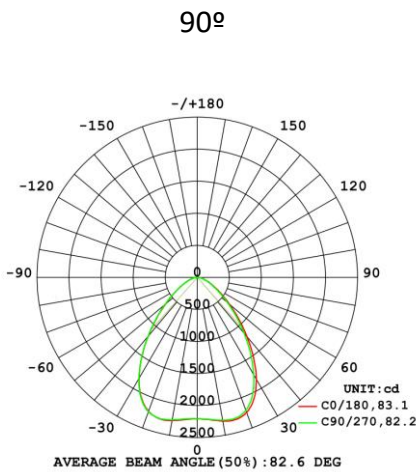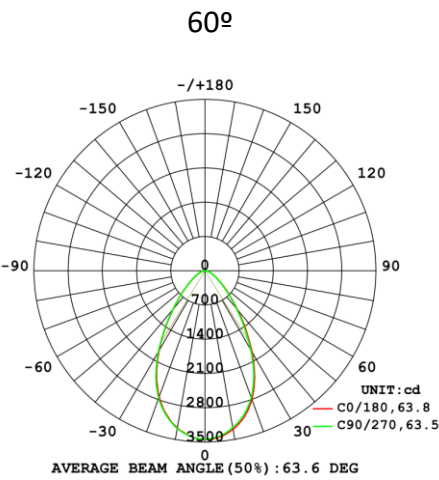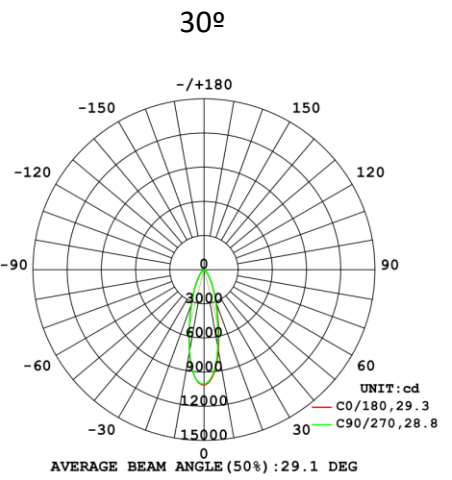

It all starts with light