


LUCEVARIA

TRACK

made in
HOLLAND


INTER
NOVA
PROFESSIONAL LIGHTING

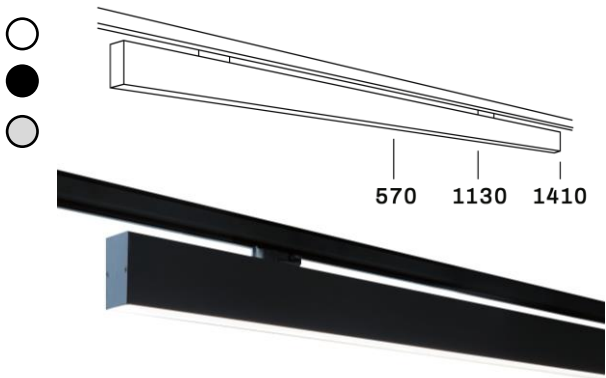


Housing	Aluminium, die cast
RAL colour	9004 (Black), 9003 (White), 9006 (Grey)
Fixture type	3-phase track light
Module	Osram LED Linear
Driver	Osram driver
Lumen output	570mm: 1500lm 1130mm: 3000lm 1410mm: 3850lm
CCT	3000K, 4000K, 5000K, 6500K
CRI	>80Ra, >90Ra
Beam angles	120°
Adapter	Powergear® 3-phase adapter included
Expected Lifetime	>50.000h (L90/B50)
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
1300 grams	60 x 9 x 17 cm	1
2300 grams	116 x 9 x 17 cm	1
3100 grams	145 x 9 x 17 cm	1

LED MODULES



OPTIONS




LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Osram LED Linear	1500Lm	11W	136	830, 840	>80Ra						
Osram LED Linear	1500Lm	15W	100	930	>90Ra						
Osram LED Linear	1500Lm	13W	115	940	>90Ra						
Osram LED Linear	3000Lm	22W	136	830, 840	>80Ra						
Osram LED Linear	3000Lm	30W	100	930	>90Ra						
Osram LED Linear	3000Lm	26W	120	940	>90Ra						
Osram LED Linear	3850Lm	28W	128	830, 840	>80Ra						
Osram LED Linear	3850Lm	39W	99	930	>90Ra						
Osram LED Linear	3850Lm	34W	113	940	>90Ra						

LED modules
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K
Premium White (PW): for fresh white and depth of colour in retail environments
¹) Lumen output of LED module (COB)
²) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
³) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

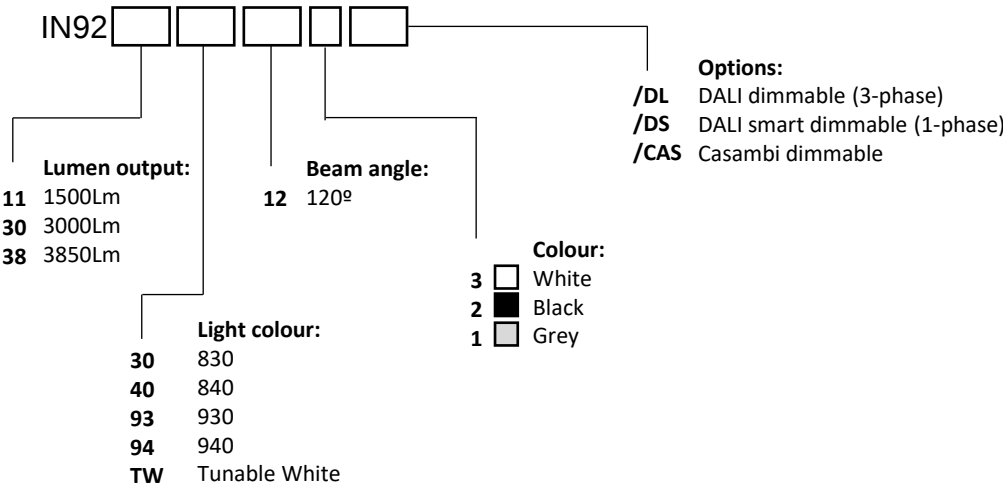

POLAR DIAGRAMS

120°

