METEORA







Net Weight	Dimensions carton L x W x H	Qty outer carton			
622 grams	8 x 7 x 24 cm	24			

Aluminium, die cast Housing

9004 (Black), 9003 (White), 1036 (Gold) **RAL colour**

Surface mounted Fixture type Module Bridgelux V10 TRIAC dimmable driver Driver

Lumen output 1100lm 2700K, 3000K CCT CRI >90Ra

15º, 24º, 40º Beam angles 350⁰ Rotatable 90º **Tiltable**

50.000h L80/B10 **Expected Lifetime** RG1 unlimited **Photobiological safety** Power factor > 0.9

< 19 UGR 3 SDCM **Colour consistency** Warranty

3 years warranty on LED module and driver

LED MODULES

Standard



OPTIONS

LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	сст	CRI	Description	Lumen	Watt	Lm/W	сст	CRI
Bridgelux V10	1100Lm	15W	73	927, 930	>90Ra						

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

1) Lumen output of LED module (COB)

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value. Technical data can be changed by Internova without prior notice.

It all starts with light


²) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

METEORA SURFACE





ARTICLE CODE STRUCTURE

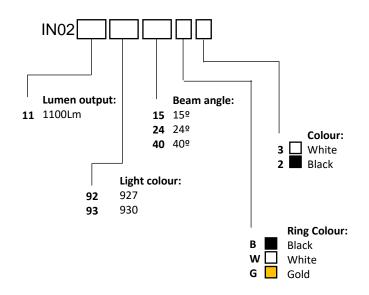

POLAR DIAGRAMS

