METEORA









Ø 60 Module

Qty outer carton

24

Lumen output CCT CRI Beam angles Adapter Rotatable

Housing

Driver

RAL colour Fixture type

Tiltable **Expected Lifetime Photobiological safety**

Power factor UGR

Colour consistency

Warranty

Aluminium, die cast

9004 (Black), 9003 (White), 1036 (Gold)

3-phase track light Bridgelux V10

TRIAC dimmable driver

1100lm 2700K, 3000K >90Ra 15º, 24º, 40º

Powergear® 3-phase adapter included

90⁰

50.000h L80/B10 RG1 unlimited

> 0.9 < 19 3 SDCM

3 years warranty on LED module and driver

LED MODULES



Net Weight

491 grams





OPTIONS

Dimmable







LED MODULE OPTIONS

Dimensions carton L x W x H

8 x 7 x 24 cm

Description	Lumen	Watt	Lm/W	сст	CRI	Description	Lumen	Watt	Lm/W	сст	CRI
Bridgelux V10	1100Lm	15W	73	927, 930	>90Ra						
Bridgelux V10 DTW	1100Lm	15W	73	(3000K – 2000K)	>90Ra						

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

1) Lumen output of LED module (COB)

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value. Technical data can be changed by Internova without prior notice.

It all starts with light


²) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

METEORA





ARTICLE CODE STRUCTURE

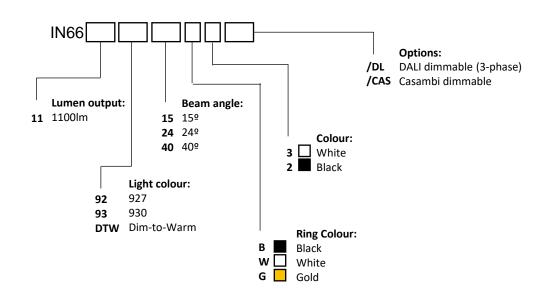

POLAR DIAGRAMS

