

Housing	Aluminium, die cast
RAL colour	9004 (Black), 9003 (White)
Fixture type	Recessed
Module	Philips Fortimo DLM FLEX G2 LED module
Driver	Philips Xitanium external LED driver with strain relief
Lumen output	1100lm, 2000lm, 3000lm
CCT	3000K, 4000K
CRI	>80Ra
Beam angles	70°
Cut out size	L190 x W190 x H134
Expected Lifetime	L80B10 >70.000 / L90B50 >50.000h
Photobiological safety	RG1 unlimited
Power factor	> 0.9
LOR	> 90%
UGR	< 19
Colour consistency	3 SDCM
Warranty	5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
1260 grams	23 x 21 x 15 cm	12

LED MODULES

Standard



OPTIONS

Dimmable

Dimmable

Dimmable

Casambi



LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.


³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour

temperature is subject to a tolerance of up to ± 150 Kelvin compared to the nominal value.


Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

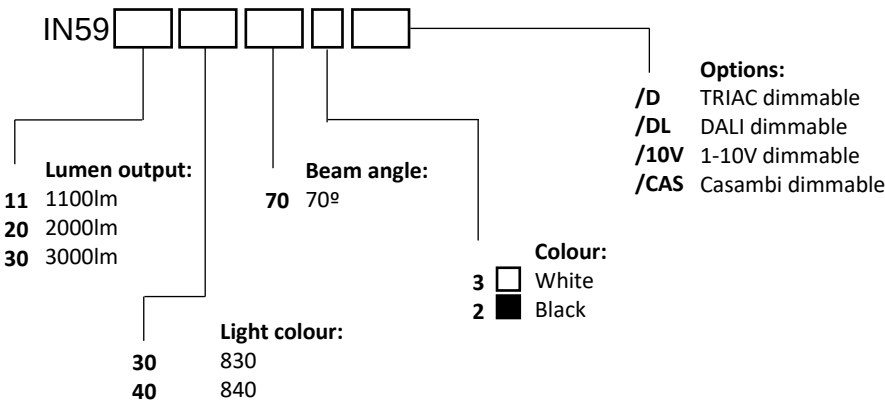

POLAR DIAGRAMS

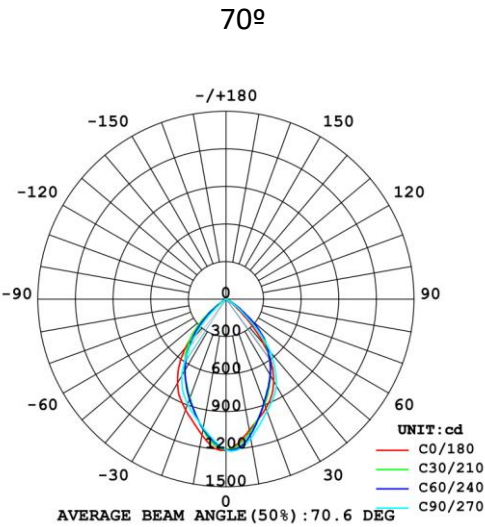

It all starts with light