

# CENTRO



## Colours

## Housing

## Fixture type

## Module

## Driver

## Light Output module

## CCT

## CRI

## Beam angles

## LED modules

## Dimming Options

## Options

## Expected Lifetime

## Cut out Size

## Photobiological safety

## Power factor

## LOR

## Colour consistency

## Warranty



Aluminium, die cast

Recessed IP44 downlight

Philips Fortimo DLM FLEX G2 LED module

Philips Xitanium external LED driver with strain relief

1100lm, 2000lm, 3000lm, 4500lm

3000K, 4000K

>80Ra

50°

Standard

TRIAC, DALI, 1-10V, Casambi

Glass cover (standard), Emergency unit

>50.000h (L90/B50)

Ø200 x H128mm

RG1 unlimited

> 0.9

> 90%

3 SDCM

5 years warranty on LED module and driver

### Net Weight

### Dimensions carton L x W x H

### Qty outer carton

1421 grams

22 x 22 x 16 cm

12

## Available LED Modules

**PHILIPS**  
LED DLM INSIDE

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Philips Fortimo DLM FLEX G2	1100lm	9W	122	830, 840	>80						
Philips Fortimo DLM FLEX G2	2000lm	16W	125	830, 840	>80						
Philips Fortimo DLM FLEX G2	3000lm	24W	125	830, 840	>80						
Philips Fortimo DLM FLEX G2	4500lm	42W	107	830, 840	>80						

### LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments


<sup>1)</sup> Lumen output of LED module (COB)

<sup>2)</sup> Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

<sup>3)</sup> Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.

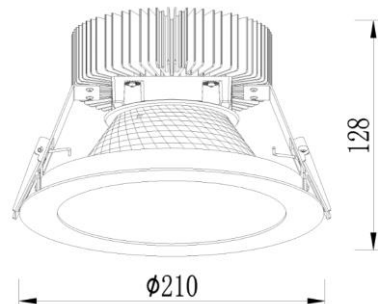

**INTERNOVA**  
PROFESSIONAL LIGHTING