
SOTTILE40





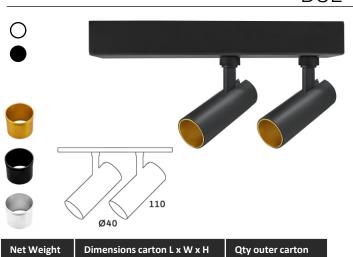

On request

On request

Housing **RAL colour** Fixture type Module Driver Lumen output CCT

CRI Beam angles Adapter Rotatable

Expected Lifetime Photobiological safety Power factor Colour consistency Warranty

OPTIONS

500lm, 700lm Tiltable

Aluminium, die cast

9004 (Black), 9003 (White), 1036 (Gold)

Surface mounted Bridgelux V10 TRIAC dimmable driver

2700K, DTW (3000K - 2000K)

>90Ra 15º, 24º, 40º

Powergear® 3-phase adapter included

90⁰ 50.000h L80/B10

RG1 unlimited > 0.9 3 SDCM

3 years warranty on LED module and driver

LED MODULES



On request



LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	сст	CRI	Description	Lumen	Watt	Lm/W	сст	CRI
Bridgelux V10	1100Lm	15W	73	927, 930	>90Ra						
Bridgelux V10 DTW	1100Lm	15W	73	(3000K – 2000K)	>90Ra						

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

1) Lumen output of LED module (COB)

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value. Technical data can be changed by Internova without prior notice.

It all starts with light

²) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.