

Housing
RAL colour
Fixture type
Module
Driver
Lumen output
CCT

Aluminium, die cast
9004 (Black), 9003 (White)
3-phase track light
RGBWW + TW
48V DC constant voltage
3000lm
TW (2500K-7000K)
RGBWW (RGBW + 1800K-16000K)
>90Ra
15°, 24°, 40°, 60°
Powergear® 3-phase adapter included
350°
90°
L80B10 >70.000 / L90B50 >50.000h
RG1 unlimited
> 0.9
> 90%
1 SDCM
5 years warranty on LED module and driver

- CRI
- Beam angles
- Adapter
- Rotatable
- Tilttable
- Expected Lifetime
- Photobiological safety
- Power factor
- LOR
- Colour consistency
- Warranty

Net Weight	Dimensions carton L x W x H	Qty outer carton
1771 grams	23 x 17 x 17 cm	8

LED MODULES

Standard



OPTIONS

Dimmable

Casambi

Honeycomb

Glass



LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.


The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.


Technical data can be changed by Internova without prior notice.

It all starts with light

ARTICLE CODE STRUCTURE

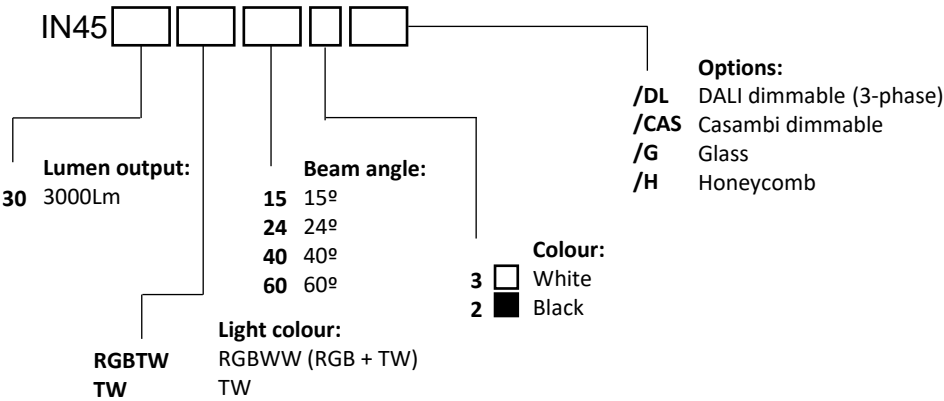

POLAR DIAGRAMS

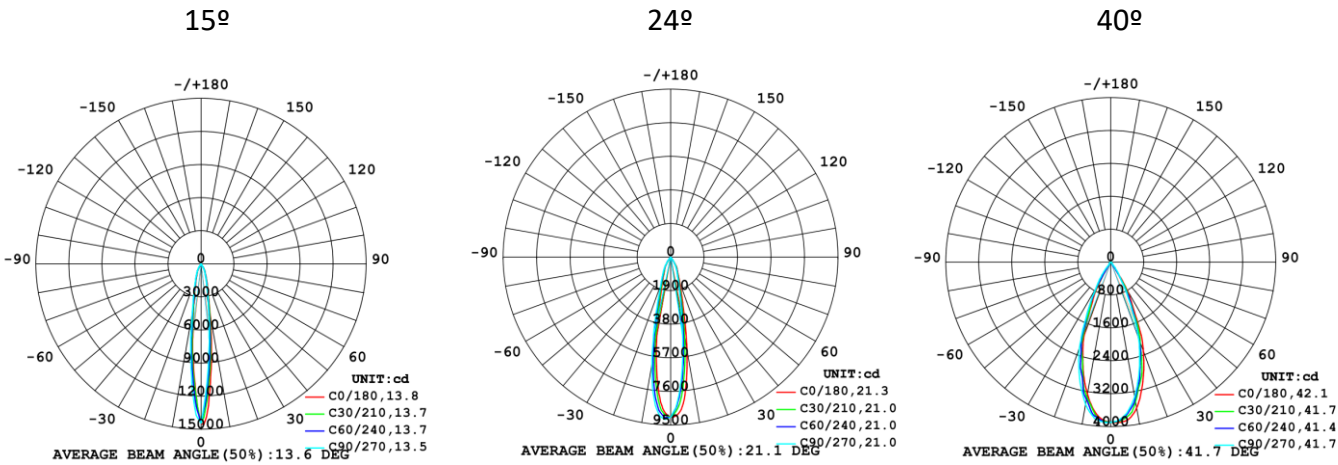

It all starts with light