

SOTTILE²

48V LOW VOLTAGE TRACKLIGHT



COLOURS



RING COLOURS



OPTIONS

Dimmable Casambi



Housing

RAL colour

Fixture type

Module

Driver

Input voltage

Lumen output

CCT

CRI

Beam angles

Expected lifetime

Colour consistency

Warranty

Aluminium

9004 (Black), 9003 (White), 1036 (Gold)

48V tracklight

Bridgelux V6

Adapter with build-in LED driver

48V DC

210Lm

2700K, 3000K

>90Ra

24°, 40°

50.000h (L90/B50)

3SDCM

3 years warranty on LED module & driver

Net weight per piece

92 grams


Dimensions carton

9 x 3 x 18 cm


Rated voltage per circuit

48V / 16A

DIMENSIONS



ARTICLE CODE STRUCTURE

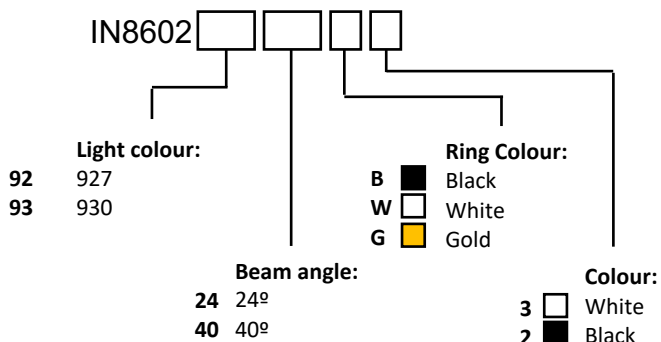

LED MODULE DATA

Description	Lumen	Watt	Lm/W	CCT	CRI
Bridgelux V6	210Lm	6W	32	927, 930	>90Ra

It all starts with light