

SALINA

48V LOW VOLTAGE TRACKLIGHT



COLOURS



RING COLOURS



OPTIONS

Dimmable Casambi



Housing

RAL colour

Fixture type

Module

Driver

Input voltage

Lumen output

CCT

CRI

Beam angles

Expected lifetime

Colour consistency

Warranty

Net weight per piece

Suspension length

Dimensions carton

Rated voltage per circuit

Aluminium, die cast

9004 (Black), 9003 (White), 1036 (Gold)

Pendant fixture with 48V adapter

Bridgelux V6

Adapter with build-in LED driver

48V DC

600Lm

2700K

>90Ra

50°

50.000h (L80/B10)

3SDCM

3 years warranty on LED module & driver


550 grams

120 cm


9 x 7 x 58 cm

48V / 16A

DIMENSIONS

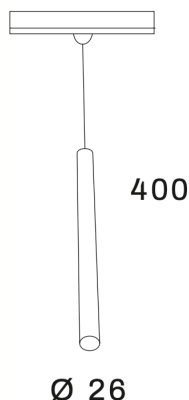

ARTICLE CODE STRUCTURE

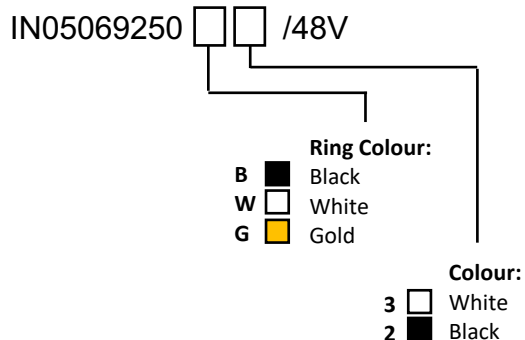

LED MODULE DATA

Description	Lumen	Watt	Lm/W	CCT	CRI
Bridgelux V6	600Lm	7W	85	927	>90Ra

It all starts with light