


LUMINOSA SURFACE
SURFACE MOUNTED LIGHTING

made in
HOLLAND

AVAILABLE IN

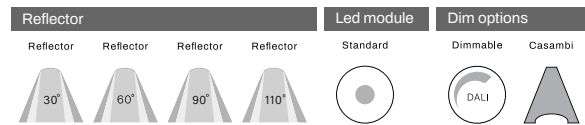

Lumen output	1140mm:	4500lm • 6000lm
	1700mm:	6000lm • 9000lm
CRI	>80Ra • >90Ra	
CCT	3000K • 4000K • 5000K • 6500K	

FIXTURE SPECIFICATIONS

[View product on website](#)

Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9004 (Black) • 9003 (White)
Fixture type	Surface mounted light
LED Module	Osram Vossloh-Schwabe LED Linear
Driver	Osram Vossloh-Schwabe comfort line
IP rating	IP20
Expected lifetime	L80 / B50 @ 70.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	5 years on LED module and driver

Fixture weight:



FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Osram V-S LED 1140mm	4500lm	830	181	28.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	840 / 850 / 865	196 / 196 / 196	28.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	930	145	32.0W	DALI / Casambi
Osram V-S LED 1140mm	4500lm	940	164 / 164	32.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	830	181	38.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	840 / 850 / 865	196 / 196 / 196	38.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	930	145	42.0W	DALI / Casambi
Osram V-S LED 1140 / 1700mm	6000lm	940	164 / 164	43.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	830	181	65.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	840 / 850 / 865	196 / 196 / 196	57.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	930	145	62.0W	DALI / Casambi
Osram V-S LED 1700mm	9000lm	940	164 / 164	73.0W	DALI / Casambi

Fixture variations:

- ¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
- ²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.
- ³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the net lumen output and power consumption of both the LED module and driver.
- ⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting BV without prior notice.

ARTICLE CODE CONFIGURATOR

IN

FIXTURE LENGTH

LIGHT COLOUR

REFLECTOR

FIXTURE COLOUR

DIM OPTIONS

LUMEN OUTPUT

Article code configurator:

- ¹⁾ This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome