

SEMI - RECESSED

made in
HOLLAND



INTERNOVA
PROFESSIONAL LIGHTING




Net Weight	Dimensions carton L x W x H	Qty outer carton
356 grams	8 x 7 x 24 cm	24

Housing	Aluminium, die cast
RAL colour	9004 (Black), 9003 (White), 1036 (Gold)
Fixture type	Semi-recessed
Module	Bridgelux V6 LED
Driver	TRIAC dimmable driver
Lumen output	500lm, 700lm
CCT	2700K, DTW (3000K – 2000K)
CRI	>90Ra
Beam angles	15°, 24°, 40°
Rotatable	350°
Tilttable	90°
Cut out size	Ø70 x 45mm
Expected Lifetime	50.000h L80/B10
Photobiological safety	RG1 unlimited
Power factor	> 0.9
UGR	< 19
Colour consistency	3 SDCM
Warranty	3 years warranty on LED module and driver

LED MODULES

Standard	DTW
----------	-----



OPTIONS

LED MODULE OPTIONS

[illegible]

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

¹⁾ Lumen output of LED module (COB)

²⁾ Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.

The power of the complete fixture will be slightly higher due to the power consumption of the driver.

³⁾ Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.

Technical data can be changed by Internova without prior notice.

It all starts with light

2023-V1


METEORA-S

SEMI - RECESSED

made in
HOLLAND




ARTICLE CODE STRUCTURE

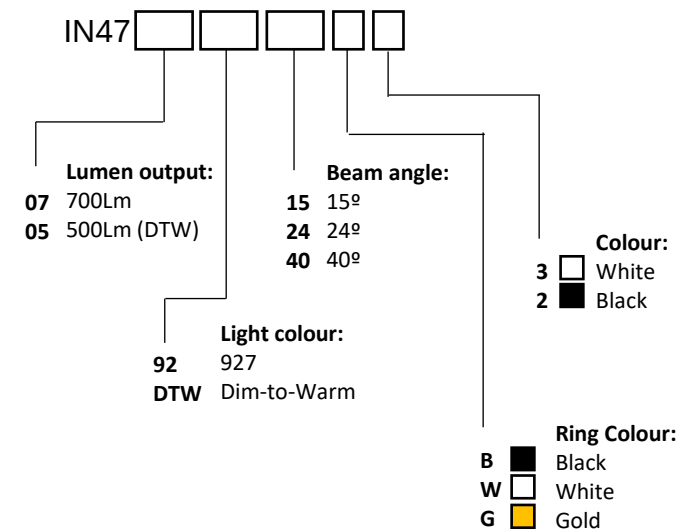


POLAR DIAGRAMS


15°

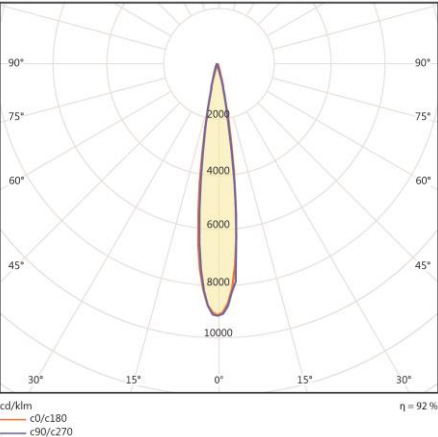

24°

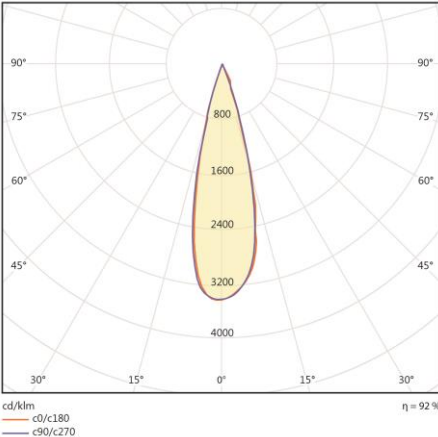

40°

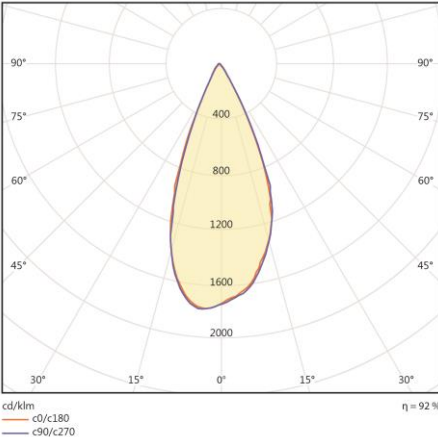

It all starts with light